


# Itanium 2 in 1U

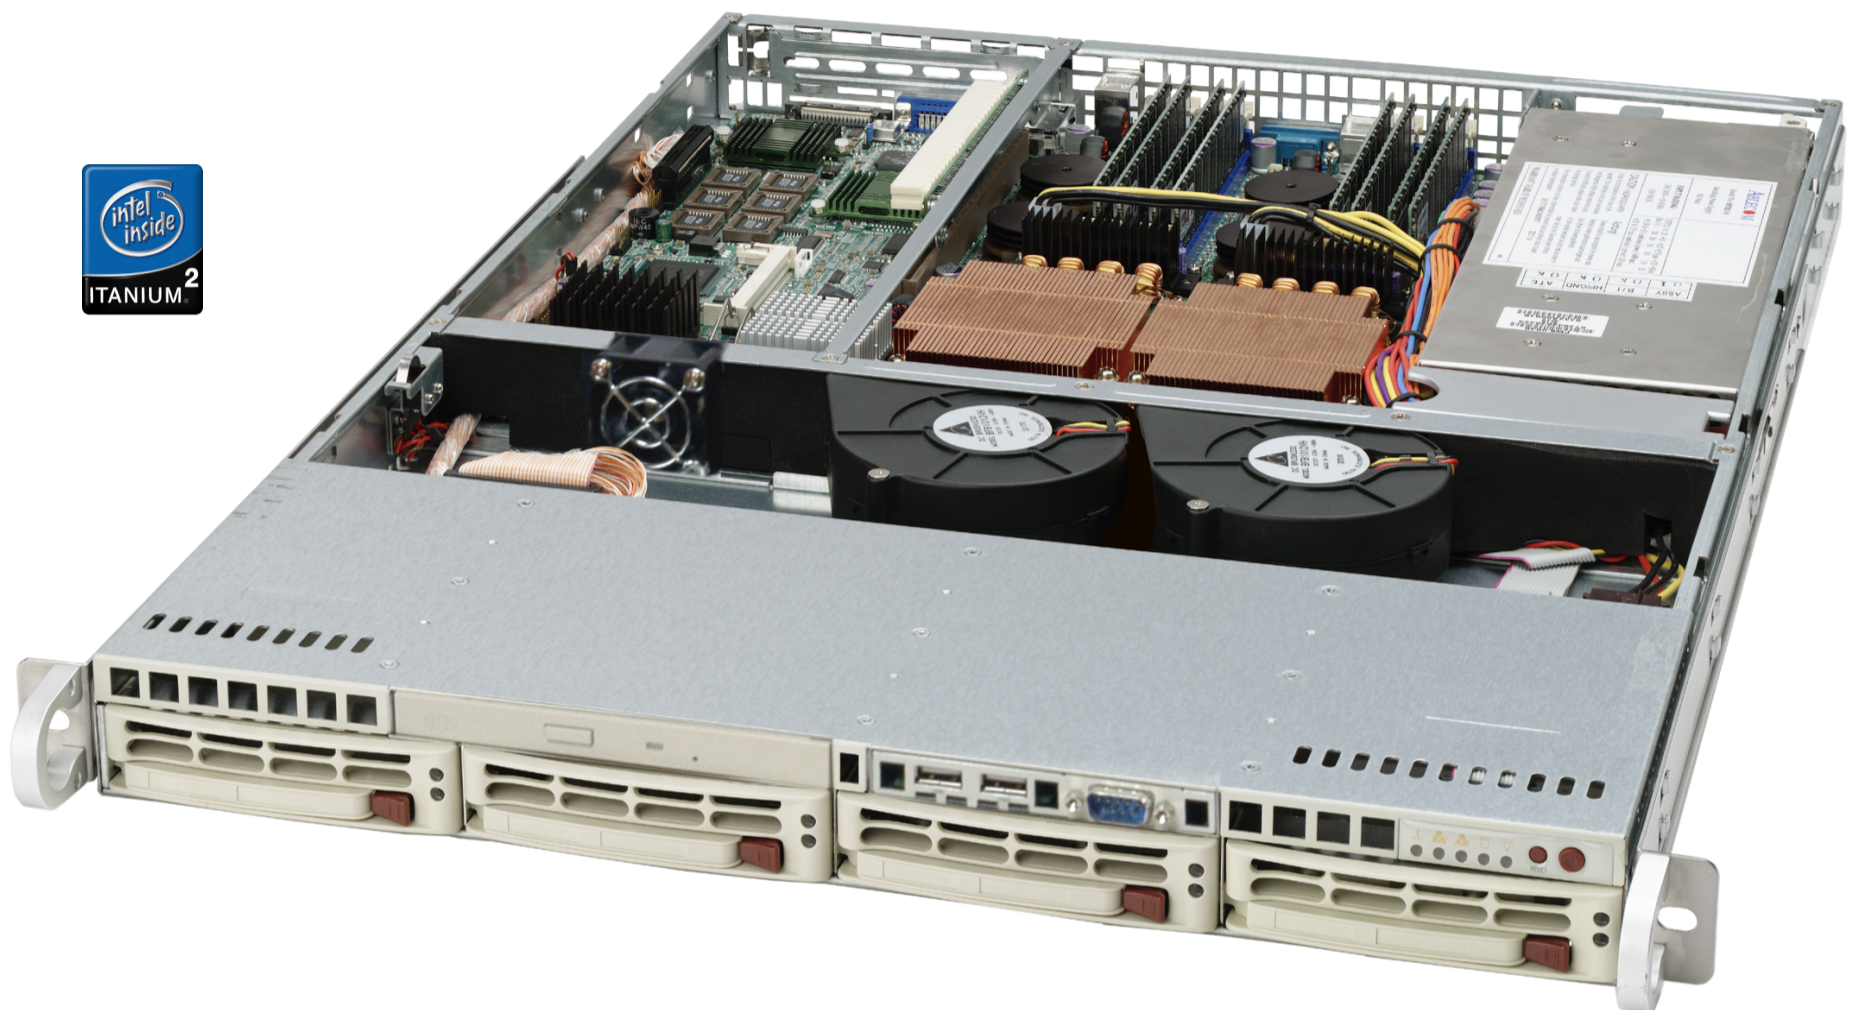

## SuperServer 6113M-8

- ✓ Dual Itanium 2 Processors up to 6MB L3 cache
- ✓ Super i2DMR-8G2/ Intel E8870 Chipset
- ✓ 16GB ECC Reg. DDR SDRAM(4-way interleaved memory)
- ✓ 1 64-bit PCI-X 133/100 for 1U, 3 64-bit PCI-X 133 for 2U
- ✓ Dual channel Ultra320 controller
- ✓ Dual Gigabit LANs
- ✓ ATI Rage XL 8MB PCI graphics controller
- ✓ IPMI 1.5 socket
- ✓ 4 x1" hot-swap Ultra320/160 SCSI SCA drive bays ( SAF-TE compliant)
- ✓ 2 x 10cm heavy duty blower fans
- ✓ 500W cold-swap power supply w/ I<sup>2</sup>C built-in
- ✓ 1 slim CD-ROM drive
- ✓ 2 front side USB ports & 1 COM port
- ✓ 1U Rackmount: 435 x 44 x 652 mm (17.2" x 1.7" x 25.7")

For the most current product information, visit: [www.supermicro.com](http://www.supermicro.com)

Headquarters:  
Super Micro Computer Inc.  
980 Rock Ave., San Jose, CA 95131 U.S.A.  
Tel: +1 (408) 503 8000 Fax: +1 (408) 503 8008  
E-mail: [marketing@supermicro.com](mailto:marketing@supermicro.com)  
<http://www.supermicro.com>

Asia-Pacific  
Super Micro Computer, Taiwan  
D5, 4F, #16, Chien-Ba Rd., Chung-Ho 235,  
Taipei County, Taiwan  
Tel: +886-2-8226-3990 Fax: +866-2-8226-3991  
<http://www.supermicro.com.tw>

European Office:  
Super Micro Computer B.V.  
Het Sterrenbeeld 28, 5215 ML, 's-Hertogenbosch, The Netherlands  
Tel: +31-(0)73-640 0390, Fax: +31 (0) 73641 6525  
E-mail: [sales@supermicro.nl](mailto:sales@supermicro.nl)  
<http://www.supermicro.com.nl>