


# K6XV3+

rev. A+

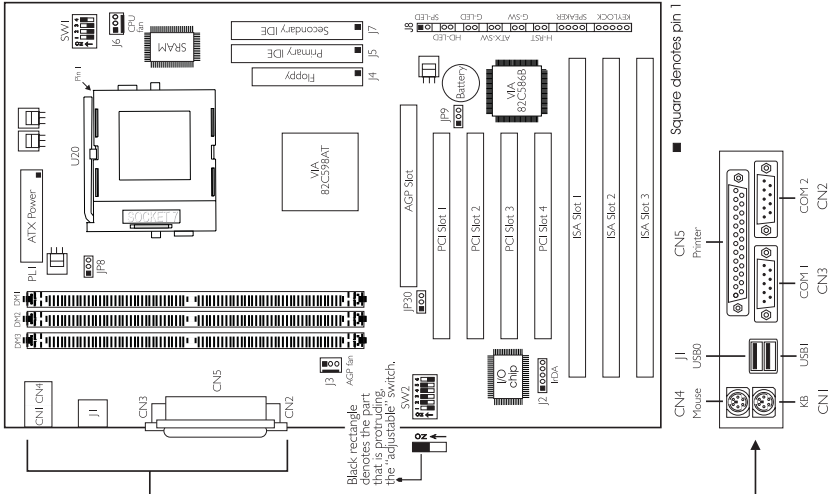

Intel - SW2: 1-6		M II-300 - 66MHz - 3.5x		WinChip2-266 - 100MHz - 2.33x		K6-2/366 - 66MHz - 5.5x	
MMX166MHz* - 66MHz - 2.5x		M II-300 - 75MHz - 3x		WinChip2-300 - 100MHz - 2.5x		K6-2/380 - 95MHz - 4x	
MMX200MHz - 66MHz - 3x		M II-333 - 83MHz - 3x		<b>AMD - SW2: 1-6</b>		K6-2/400 - 100MHz - 4x	
MMX233MHz - 66MHz - 3.5x		M II-350 - 100MHz - 3x		K6-200 - 66MHz - 3x		K6-2/450 - 100MHz - 4.5x	
<b>IBM - SW2: 1-6</b>		M II-400 - 100MHz - 3.5x		K6-233 - 66MHz - 3.5x		K6-III/400 - 100MHz - 4x	
6x86MX-PR200 - 66MHz - 2.5x		<b>IDT - SW2: 1-6</b>		K6-266 - 66MHz - 4x		K6-III/450 - 100MHz - 4.5x	
6x86MX-PR233 - 75MHz - 2.5x		C6-180 - 60MHz - 3x		K6-300 - 66MHz - 4.5x		<b>Voltage JP8 SW1</b>	
6x86MX-PR266 - 83MHz - 2.5x		C6-200 - 66MHz - 3x		K6-2/250 - 100MHz - 2.5x		2.2V	
6x86MX-PR300 - 66MHz - 3.5x		C6-225 - 75MHz - 3x		K6-2/266 - 66MHz - 4x		2.3V	
6x86MX-PR300 - 75MHz - 3x		C6-240 - 60MHz - 4x		K6-2/300 - 100MHz - 3x		2.4V	
6x86MX-PR333 - 83MHz - 3x		WinChip2-200 - 66MHz - 3x		K6-2/300 - 66MHz - 4.5x		2.8V*	
<b>Cyrix - SW2: 1-6</b>		WinChip2-225 - 75MHz - 3x		K6-2/333 - 95MHz - 3.5x		2.9V	
6x86MX-PR200 - 66MHz - 2.5x		WinChip2-233 - 66MHz - 3.5x		K6-2/333 - 66MHz - 5x		3.2V	
6x86MX-PR233 - 75MHz - 2.5x		WinChip2-240 - 60MHz - 4x		K6-2/350 - 100MHz - 3.5x		3.3V	
6x86MX-PR266 - 83MHz - 2.5x						3.5V	

Jumper JP9 (CMOS Clear) - 1-2 On: Clear CMOS Data; 2-3 On: Normal (default)  
 Before clearing the CMOS data, make sure to power-off your system and unplug the power cord.  
 Jumper JP30 (SDRAM Clock)  
 1-2 On: SDRAM CLK = AGP CLK (default); 2-3 On: SDRAM CLK = CPU CLK

\*Default

Note: Please refer to the user's manual for the settings of older CPUs.